




2050 HF SSB Transceiver

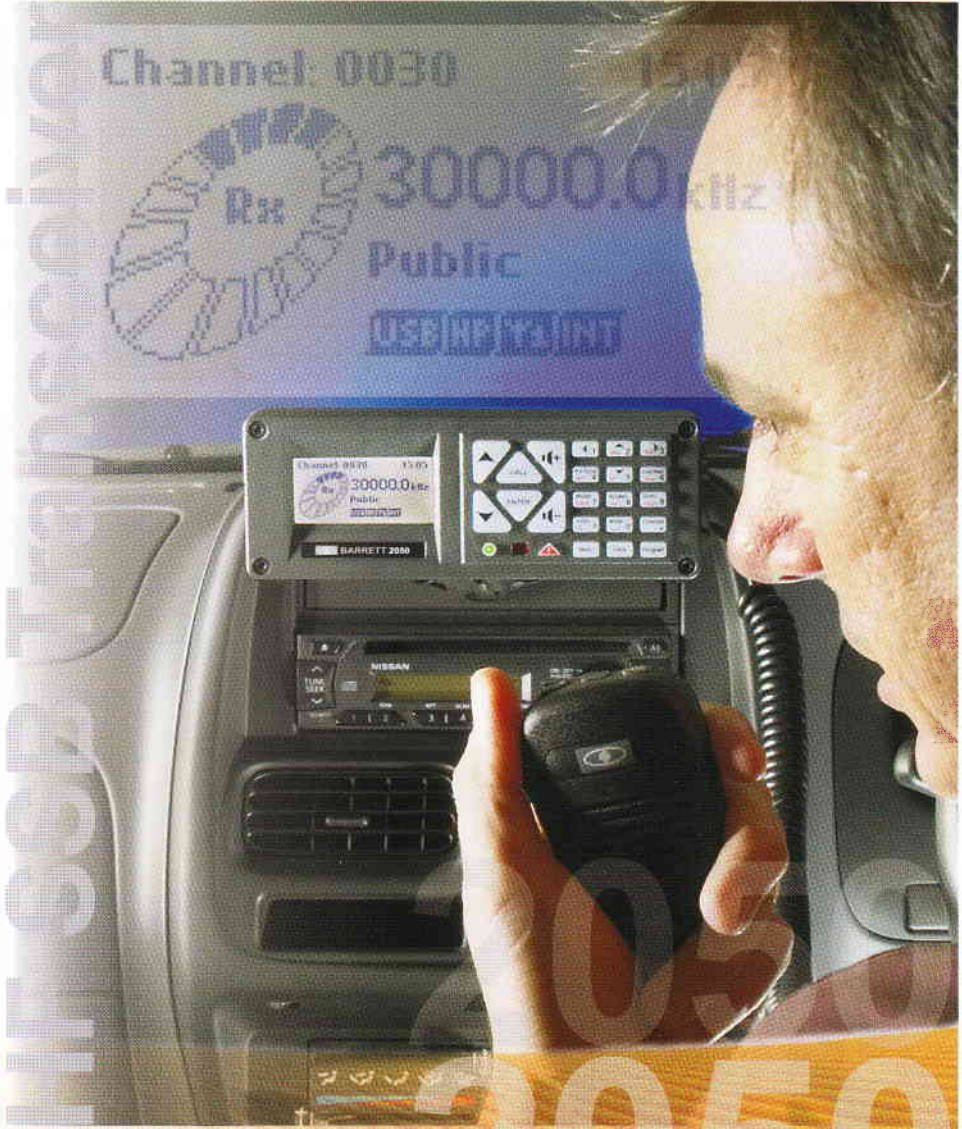

The Barrett 2050 HF transceiver, the centre piece of the 2000 series of HF communications equipment, combines current technology with the intuitive, "ease of use" that has become synonymous with Barrett Communications equipment.

In addition to providing all common modes of HF transmission, most currently used selective call formats and MIL STD 188-141B Automatic Link Establishment, the 2050 transceiver has a new generation, simple to operate, frequency hopping option.

The heart of the 2050 is a flexible soft-core processor and powerful DSP system that delivers superior reception and noise reduction while providing very low current consumption.

Housed in a lightweight, extremely strong sealed aluminum chassis, 2050 meets MIL STD 810F for drop, dust, temperature, shock and vibration.

The 2050 transceiver is packaged ready to operate as a desktop transceiver, and by adding the inexpensive "mobile pack" the 2050 becomes a mobile (trunk mounted) transceiver. This simplifies the logistics of holding base station and mobile transceivers within large organisations.

Teaming the versatile 2050 transceiver with other 2000 series products provides email, fax, telephone and data connectivity within an HF network and onwards to both the international telephone network and the Internet.

2050
2050
2050

www.barrettcommunications.com.au





2050 HF SSB Transceiver Features



2050 Front panel

Digital Signal Processing (DSP)

A single DSP chip provides modulation and demodulation of all on air signalling used in the ALE, selective call and syllabic mute processes and provides noise reduction of received signals.

Frequency hopping option

A simple to operate, unique frequency hopping system that has no network entry time or late entry time. Simply enter the hop band, cipher key number and talk.



2050 Rear panel

Simple architecture

The transceiver uses only two microprocessors, the main processor uses a soft loaded core while the second processor is used within the control head to operate the display and keypad.

Size and weight

Physically 40% smaller than our 900 series, the 2050 in a local control configuration measures only 185mm W x 270mm D x 70mm H and weighs less than 2.6kg.

Direct dial telephone calls

"Telcall" option provides direct dialing access with Barrett Communications HF Telephone Interconnects and most interconnects from other manufacturers.

"Secure Call"

An option that provides a medium level of voice encryption for message privacy.

ALE - Automatic Link Establishment

An embedded internal option fully interoperable with FED STD 1045 ALE systems. Also capable of full 16 digit telephone dialing (using FED STD 1045 ALE as the signalling medium) with Barrett 960 or Barrett 2060 ALE equipped telephone interconnects.



2050 Email Fax & Data System

GPS tracking

An option that supports connection to an external GPS receiver for tracking applications using the Barrett 977 tracking system.

HF email and data

The 2050 transceiver auxiliary connector is fully featured to interface to a variety of external modems including the Barrett 2020 HF email system and the Barrett 923 email and data system.

Configuration Flexibility

The 2050 transceiver is packaged as a desktop (local control) transceiver and with the addition of the simple and inexpensive Mobile pack the 2050 is quickly reconfiguring the right transceiver for the right application.

The modular design of the 2000 series of products as a whole enables a basic 2050 transceiver to adapt quickly and easily between base station, mobile, email, fax and

DESK TOP CONFIGURATION




2050



2050 Side View

Selective call options

Fitted with both a CCIR 493-4 based four and six digit system of which the

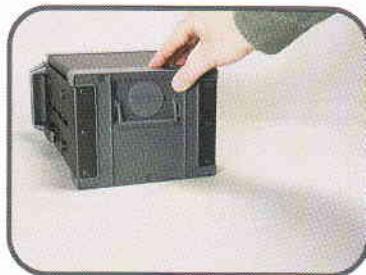

2040 Mampack battery loading



2050 HF SSB Transceiver Specifications

General Specifications

Standards	Exceeds/complies with Australian/ New Zealand standard AS/NZS 4770:2000 and AS/NZS 4582:1999 Exceeds/complies with European standard ETSI 300 373 and associated Amendment A Exceeds/complies with EMC and vibration standard IEC 945 Complies with MIL Spec. 810 F for drop, dust, temperature, shock and vibration.
Transmit frequency range	1.6 MHz to 30 MHz (continuous)
Receive frequency range	500 kHz to 30 MHz (continuous)
Channel capacity	Up to 500 programmable channels (simplex or semi-duplex)
Frequency resolution	10 Hz program mode 1 Hz tunable receiver
Frequency stability	±10 Hz or better than 0.3 PPM over temperature range -30°C to +70°C
Operating modes	J3E (USB, LSB) - H3E (AM) - J2A (CW) - J2B (AFSK) Optional J2B (AFSK) with narrow filter.
Operating temperature	-30°C to +70°C Humidity 95% relative, non-condensing
Supply voltage	2050 -13.8VDC + 20% / - 10% (negative ground) Polarity protected. Over voltage protected Manpack 22VDC to 27VDC (100-260VAC or 11 16VDC with power adaptor)
Current consumption	470mA standby (muted, back lighting off)
Selcall system	Based on CCIR 493-4, four and six digit systems. Protocol available for free distribution. Fully compatible with other major HF manufacturers four and six digit systems including encrypted systems.
Switching speed	Less than 15mS Tx to Rx, Rx to Tx

Receiver Specifications


Sensitivity	-120dBm (0.224uV) for 10dB SINAD - J3E Mode pre-amp on -110dBm (0.708uV) for 20dB SINAD - J3E Mode pre-amp on
Selectivity J3E	-1 kHz and + 4 kHz better than 50dB -2 kHz and +5 kHz better than 55dB -5 kHz and +8 kHz better than 60dB
Selectivity J2B (optional)	-500 Hz and + 500 Hz better than 60dB The level of an unwanted signal above the level of a wanted signal that will reduce the SINAD of the wanted signal from 20dB SINAD to 14dB SINAD
Blocking	-20 kHz and +20 kHz better than 71dB - the level of an unwanted signal above the level of a wanted signal that will reduce the SINAD of the wanted signal by 6dB or cause an output level change of 3dB.
Intermodulation	better than 89dBμV - the level of two unwanted signals, that are within 30kHz of the wanted signal, above the level of a wanted signal that reduces the SINAD of the wanted signal to 20dB.
Spurious response ratio	Better than 70dB
Reciprocal mixing	Better than 105dBuV
In-band IMD	Better than 34dB
Audio output	4W into 4 Ohms at less than 2% distortion
Audio response	Less than 6dB variation from 350 Hz to 2700 Hz.
Input protection	Better than 30V RMS from a 50 Ohm source

Transmitter Specifications

RF output power	125 watt PEP voice ± 1.5dB or 30 watt PEP voice ± 1.5dB or 10watt PEP voice ± 1.5dB
Duty cycle	100% two tone input signal with fan option
Intermodulation products	Better than -31dB below PEP (25dB below two tone peak)
Audio frequency response	Less than 6dB variation 350 Hz to 2750 Hz
Current consumption	Voice average less than 9Amps typical Two tone less than 12Amps typical


2050 remote control head
(trunk mount configuration)

0.22Kg

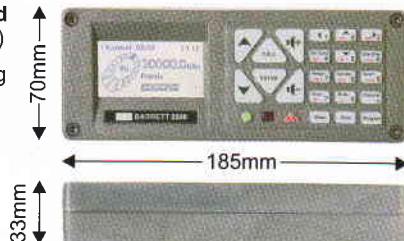


2050 remote configuration
(trunk mount)
main unit

2.36Kg

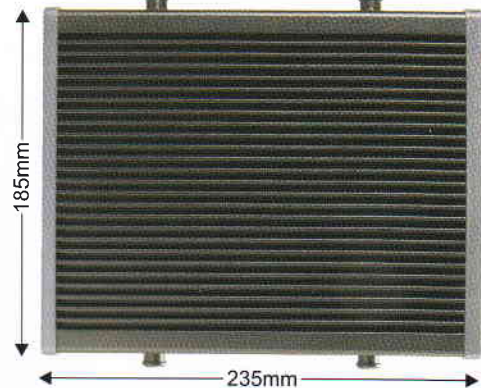

2050 local control configuration

2.58Kg

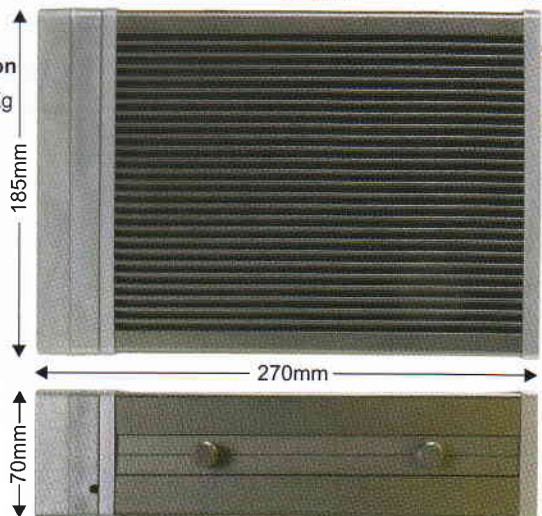

Head Office:

Barrett Communications Pty Ltd
P O Box 1214, Bibra Lake WA 6965 AUSTRALIA
Toll Free Tel: 1800 999 580 Tel: (618) 9434 1700 Fax: (618) 9418 6757
email: information@barrettcommunications.com.au
internet: www.barrettcommunications.com.au

European Office:

Barrett Europe Limited
19 Lenten Street Alton, Hampshire GU34 1HG
UNITED KINGDOM Tel: (44) 1420 542254 Fax: (44) 1420 543373
email: information@barretteurope.co.uk
internet: www.barrettcommunications.com.au



01030 Украина Киев а/я 186

КОНЦЕРН АЛЕКС

ЦЕНТРАЛЬНЫЙ ОФИС В КИЕВЕ

+380 (44) 246-46-46

+380 (44) 246-47-00

mail@alex-ua.com

www.alex-ua.com

MADE IN AUSTRALIA

